

READ THIS ENTIRE GUIDE BEFORE USING THIS PRODUCT!

IPS Pro WARRANTY INFORMATION

IPSPRO warrants this product to the original purchaser for One Year for manufacturing defects due to faulty components or workmanship for One year from the date of purchase for Registered users. This warranty does not cover part failure due to non compliance with operating instructions, normal wear, or tool abuse resulting in cracked, broken or damaged components. Deficient parts or units will be replaced or repaired based on IPSPRO'S discretion. For replacement parts, or warranty repairs, contact one of our Authorized Repair Facilities listed below, or a IPSPRO vendor on our website at www.ipspro.uk Return freight, packing and insurance costs, if any, will be paid by the owner. This warranty gives you specific legal rights, and you may also have other rights, which vary.

Authorized Repair Facilities

UK

www.ipspro.uk

01733 211199

SoftWash UK Ltd, 20 Alderlands Close, Crowland, Peterborough. PE6 0BS

The Manufacturers Warranty will be voided if the following procedures are not followed.

You must register your sprayer by using one of the methods below.

During use, **always use one of the provided filters** to prevent debris from clogging the pump. After every use, rinse out the sprayer and tips by spraying 1 gallon of water (approximately 2 minutes) through the pump to rinse any residual products from the unit to prevent corrosion or clogs, then remove the battery.

If used for applying sealers, deck stains and other coating products, always rinse the gun using a Sodium Hydroxide based deck stain stripping product. **DO NOT USE MINERAL SPIRITS OR PAINT THINNERS.**

Chemical Compatibility

This product can NOT be used with Sodium Hypochlorite recipe over 10% in strength, or chemicals that contain solvents, non-water based diluents, Acetone, Xylene, Acids, paint removers or similar products.

WARRANTY REGISTRATION

To register your IPSPRO gun for Warranty coverage visit <http://www.softwashing.uk/ipsprowarranty.html> or fill out the form below and mail it with a copy of your Receipt to: SoftWash UK, 20 Alderlands Close, Peterborough. PE6 0BS

Full Name: _____ Email Address: _____

Mailing Address: _____

Date of Purchase: _____ Place of purchase _____

Product Serial Number From Top Of Sprayer: _____

Safety Warnings

Stay alert and vigilant, be focused on the work you are doing and be cautious of your surroundings while using this device. Do not use when you are tired or under the influence of alcohol, drugs, or medications. Use safety gloves, protective masks, and protective glasses.

Battery Safety: Only use the batteries and charger provided with the tool. When batteries are not being used, keep them away from any metal objects like paper clips, coins, keys, nails, or screws. Keep the battery charger, batteries and gun motor dry at all times to avoid damage or electrical shock. When damaged, liquid can leak from the battery; avoid contact with the substance. In the case of an accidental contact, clean with water. If the fluid gets into your eyes immediately rinse with water and seek medical assistance.

Using The IPSPRO Spraying System

Step 1: Unpack the sprayer and make sure the kit is complete.

Step 2: Charge the battery by following the directions on the battery chargers label. Always fully charge the battery before the first use. The initial charge of the battery can take longer than an hour.

Step 3: Insert the battery into the bottom of the sprayer by gently sliding it in until you hear a «click». To remove the battery, press and hold the button on the battery and gently pull the battery off.

Step 4: Insert the hose on the bottom of the sprayer. Next, insert the filter on the opposite end of the hose and place filter into your container. To use the sprayer with a bottle. Use the small hose and attach bottle to the bottom of gun.

NOTE: ALWAYS USE A FILTER, And when working at heights, start the device on ground level to prime the pump.

Option 1, Using The Standard Nozzle Pack Assembly



Depending on the type of product your spraying, select the appropriate nozzle, and install it directly on the end of the wand, or you can unscrew the plastic wand from the gun and attach it directly to the end of the gun.

Option 2, Using The Brass Wand

A  Insert the Brass Pipe into the Red Plastic Coupler.

B  Then attach it to the end of the black wand, or directly to the end of the Gun.

C  Insert the other Red Plastic Coupler on the other side of the Brass wand, then screw on one of the two connectors. Then screw on one of the plastic spray nozzles to the end of the connector.

Option 3, Using The Quick Connect Accessory

Sold Separately

 To use the Quick Connect Tips, slide back the metal sheath around the Quick Connect and insert one of the Quick Connect Nozzles. Then slide the metal sheath forward again until it clicks back in place.

 Use this Quick Connect to use the Brass wand and plastic tips with the Quick Connect Kit as shown below.



Option 4, Using The 1 Meter, 2 Meter, or 3 Meter Extensions

Sold Separately

 Unscrew the plastic wand from the gun and attach the extension directly to the end of the gun.
WARNING: When using an extension, always use two hands to maintain control of the wand.

OPERATING TIPS FOR THE IPSPRO SPRAYING SYSTEM

Cleaning the Nozzles

Use the nozzle disassembly key counter clockwise to remove the green nozzle holder from inside the tip.

USING THE IPSPRO WITH THICKER FLUIDS

When spraying thicker liquids like deck stains, using a shorter hose with a larger ID Diameter will provide a better spray pattern.

For example, when using the Wood Pro kit cut off a 2" piece of the existing 1/4" hose and attach it to the bottom of the gun.



Insert the Hose Barb Reducers 1/4" side into the 1/4" piece of hose, then slip the larger hose on to the 5/16" side.

Insert the strainer on to the end of the 5/16" hose and your ready to go! **NOTE:** For thicker liquids try cutting off a few feet of the supply line for the best spray pattern.

NOTE: If used for applying sealers, deck stains and other coating products, **always rinse the gun using a Sodium Hydroxide based deck stain stripping product.** **DO NOT USE MINERAL SPIRITS OR PAINT THINNERS.**

TROUBLESHOOTING:

Gun does not pull chemicals through the hose

Usually this is caused by debris entering the pump, using the sprayer with a chemical that its not designed for, or if the pump is not completely rinsed out after the last use.

To try to solve this problem easily, hook up your hose to your gun, then insert the other end of your hose into a garden hose, or sink faucet, to "PUSH" water to the pump, while running the sprayer for a few minutes. Usually this will flush out any debris and the gun will start working normally again.

If this does not solve the problem, then you can always replace the seals or rebuild the pump in about 15 Minutes yourself, or you can mail it to one of our Authorized Repair Facilities for an estimate.


For Repair Videos, Parts Or Repairs, Contact Your IPSPRO Vendor Or Visit www.ipspro.uk

Broken Or Lost Parts

If you dropped your gun or drove over it with your car, Don't Worry, Repairing the IPSPRO is an easy 10-15 Minute job, and you only need a Phillips Screwdriver, and Allen Wrench to do it!

For Repair Videos, Parts Or Repairs, Contact Your IPSPRO Vendor Or Visit www.ipspro.uk

GET REPLACEMENT PARTS ONLINE AT www.ipspro.uk

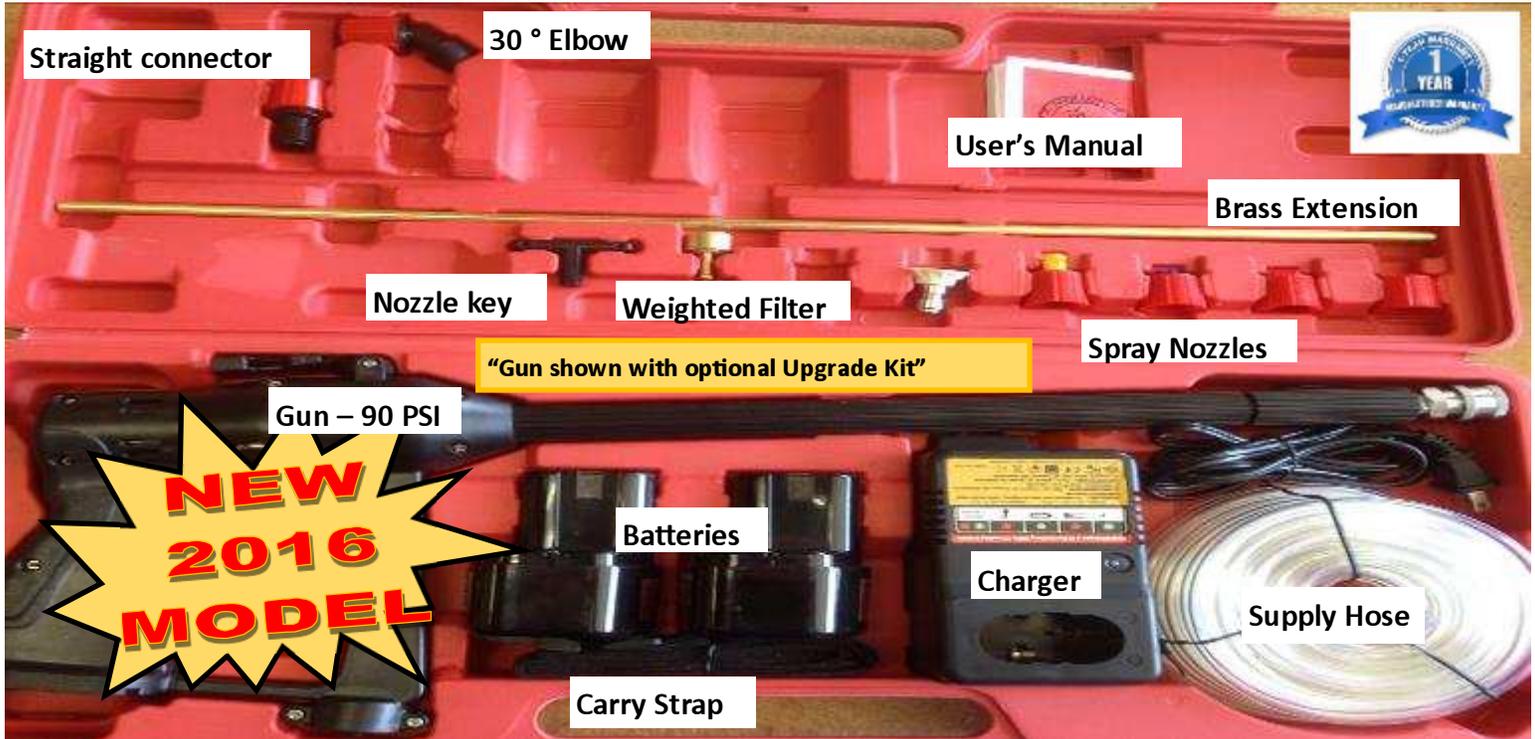

Flat fan 10005020 1.6 mm 84 L/H	
QTY	Piece Number
1	10005062 Viton Joint
1	10005057 Red Nozzle
1	10005061 Locking Screw
1	10005051 Nozzle Nut



Mist jet nozzle 10005026 1.2 mm 48 L/H + elbow 30°	
QTY	Piece Number
1	10005051 Nut
1	10005061 Locking Screw
1	10005062 Viton Joint
1	10005055 Stainless Steel Sheet dia 1,2
1	10005052 Elbow 30°



Flat fan 10005022 1.4 mm 61 L/H	
QTY	Piece Number
1	10005051 Nozzle Nut
1	10005062 Viton Joint
1	10005058 Blue Nozzle
1	10005061 Locking Screw



Tube nut + nut	
QTY	Piece Number
1	10005064 Straight Closure
1	10005050 Tube Nut



Flood jet nozzle N° 10005024 0.8 mm 42 L/H	
QTY	Piece Number
1	10005051 Nozzle Nut
1	10005061 Locking Screw
1	10005062 Viton Joint
1	10005059 Yellow Nozzle



Nozzle disassembly key	
QTY	Piece Number
1	10005028



Concentrated jet nozzle 10m	
QTY	Piece Number
1	10005051 Nozzle Nut
1	Nozzle 5013 PP straight jet
1	10005061 Locking Screw
1	10005062 Viton Joint

#89510 Pump Rebuild Kit	
QTY	Parts
3	
1	
1	
1	

#89500 WP Upgrade Kit	
1	Hose Barb
20'	Hose
1	high volume filter
1	1/4" QC Nozzle 40°
1	1/4" QC Nozzle 0°
1	1/4" QC Socket
1	1/4" QC Plug